

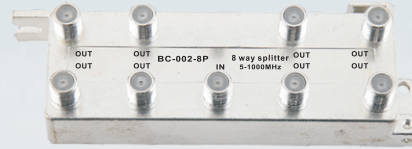
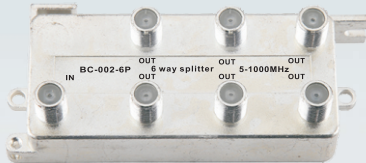




5-1000MHz CATV SPLITTERS



FEATURES:

- ★ Suitable for 5-1000MHz CATV wide band.
- ★ Zinc-die-cast housing and nickel-plated, For high shielding.
- ★ Indoor using, With low insertion loss, high isolation and high reflection.
- ★ High quality component and professional design.
- ★ Connectors: "F" type female, 75ohm.

SPECIFICATION:

Item	Frequency Range	BC-002-2P	BC-002-3P (unbalance)	BC-002-3P (balance)	BC-002-4P	BC-002-6P	BC-002-8P
Insertion Loss (IN-OUT)	5-47MHz	≤3.3	≤3.3\≤6.5	≤5.2	≤6.5	≤9.2	≤10.2
	47-470MHz	≤3.5	≤3.5\≤7.0	≤5.5	≤7.0	≤9.7	≤10.8
	470-860MHz	≤3.8	≤3.6\≤7.5	≤5.8	≤7.5	≤10.5	≤11.8
	860-1000MHz	≤4.0	≤3.9\≤7.8	≤6.2	≤7.8	≤11.0	≤12.2
Isolation (OUT-OUT)	5-47MHz	≥25	≥25	≥25	≥25	≥25	≥25
	47-470MHz	≥28	≥28	≥28	≥28	≥28	≥28
	470-860MHz	≥28	≥28	≥28	≥28	≥28	≥28
	860-1000MHz	≥26	≥26	≥26	≥26	≥26	≥26
Return Loss (IN)	5-47MHz	≥20	≥20	≥20	≥20	≥20	≥20
	47-470MHz	≥20	≥20	≥20	≥20	≥20	≥20
	470-860MHz	≥20	≥20	≥20	≥20	≥20	≥20
	860-1000MHz	≥20	≥20	≥20	≥20	≥20	≥20
Return Loss (OUT)	5-47MHz	≥22	≥22	≥22	≥22	≥22	≥22
	47-470MHz	≥25	≥25	≥25	≥25	≥25	≥25
	470-860MHz	≥22	≥22	≥22	≥22	≥22	≥22
	860-1000MHz	≥20	≥20	≥20	≥20	≥20	≥20